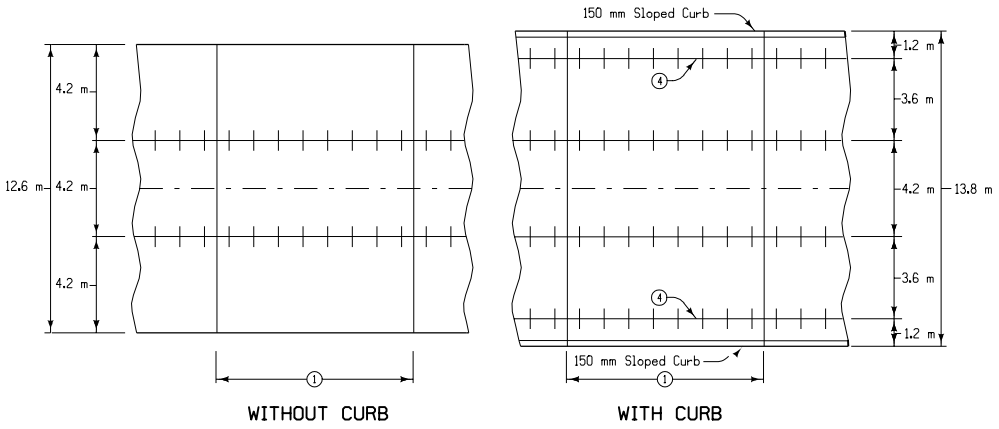

TYPICAL PAVEMENT PLAN

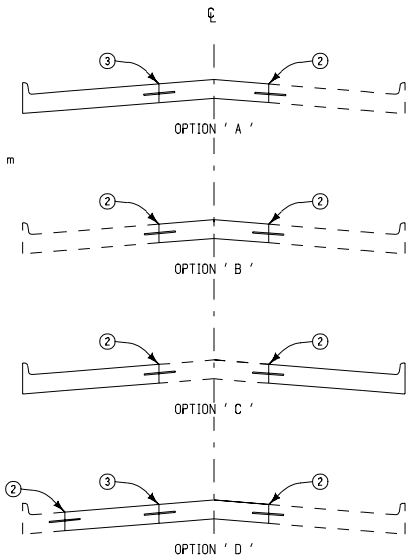

PAVING OPTIONS (WITH CURB)

OFFSETS FOR 13.8 m PAVEMENT WITH 150 mm SLOPED CURBS										
Distance from ℄		2.1 m	1.5 m	1.0 m	0.5 m	0 m	0.5 m	1.0 m	1.5 m	2.1 m
(A)	mm	42	30	20	10	0	10	20	30	42
(B)	mm	0	12	22	32	42	32	22	12	0

PER STATION PAVEMENT SECTION		
(W)	DESCRIPTION	SURFACE AREA (m^2)
13.8 m	CURB UNIT BOTH SIDES	1380 m^2
13.2 m	CURB UNIT ONE SIDE	1320 m^2
12.6 m	NO CURBS	1260 m^2

Unless specified otherwise in the detail project plans it is the contractor's option to construct 13.8 m PCC pavement in one of the following options:

Option 'A' Pour center 4.2 m lane with one 4.8 m outside lane with integral curb then pour remaining 4.8 m outside lane with curb.

Option 'B' Pour center 4.2 m lane then pour 4.8 m outside lanes with integral curb.

Option 'C' Pour both 4.8 m outside lanes with integral curbs then pour center 4.2 m lane.

Option 'D' Pour center 4.2 m lane with one 3.6 m lane then pour remaining 1.2 m gutter secton and 4.8 m outside lane with integral curb.

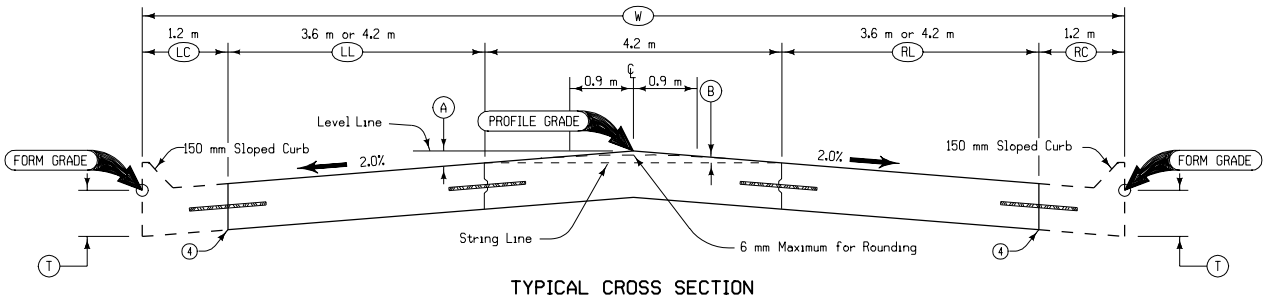

TYPICAL CROSS SECTION

GENERAL NOTES:

Details indicated on this plan are intended to illustrate the general requirements for Three–lane P.C. Concrete Pavements 13.0 meters in width.

Refer to Standard Road Plans RH–50, RH–51 and RH–52 for details of construction of joints in pavement. End of day's work joint and joint at bridge approach section shall be constructed perpendicular to center line. Transverse Joints will be 'CD' except when 'C' joints are specifically required as a part of detail project plans or when T is less than 200 millimeters.

Normal crown shall be a straight line sloped from the profile grade for the distance and rate indicated. This crown may be varied through superelevated curves and intersection areas where special shaping is required or other areas specifically authorized by the Engineer.

The price bid for "Standard or Slip–Form PCC Pavement" class and thickness as specified, including all required joints, shall be considered full compensation for the construction of pavement as detailed hereon.

(1) Transverse joint spacing 6.0 meters (normal) for 'CD' joint (no dowels in outside 1.2 meters of pavement). 4.5 meters (normal) for 'C' joint.

(2) 'BT–1' Joint if pavement thickness is less than 200 millimeters. 'KT–2' Joint, if pavement thickness is 200 millimeters or greater.

(3) 'L–1' Joint if pavement thickness is less than 200 millimeters. 'L–2' Joint, if pavement thickness is 200 millimeters or greater.

(4) Optional joint. 'BT–1' Joint if pavement thickness is less than 200 millimeters. 'KT–2' Joint, if pavement thickness is 200 millimeters or greater.

All dimensions given in millimeters unless noted.

METRIC VERSION

Iowa Department of Transportation
Highway Division

STANDARD ROAD PLAN **RH–45E**

REVISION: NEW

REVISION NO.: NEW

REVISION DATE: 10-02-01

William J. Stein
APPROVED BY DESIGN METHODS ENGINEER

THREE LANE
P.C. CONCRETE PAVEMENT
(WITH 150 mm SLOPED CURB)